

# ELEKTRONINEN KIERTOVIESIPUMPPU

## IBO NOVA

NOVA IBO-kiertovesipumppu on varustettu kestmagneettimoottorilla ja paine-eron säädinautomatiikalla, joka säätää tehon todellisen tarpeen mukaan.



Pumpun ohjauspaneeli sijaitsee moottorin päällä, josta voi seurata reaaliaikaista virrankulutusta.

Akseli pyöräytettävissä myös mekaanisesti.

Sähkönkulutus A-luokkaa.

Sisältää kytketyn virtajohdon, liittimet, sekä tiivisteet.

Takuu 2 vuotta

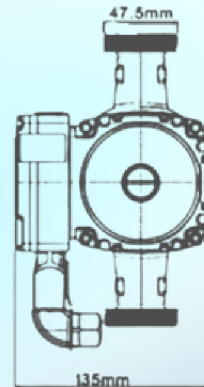

### TECHNICAL DATA

Supply voltage	1×230V +6%/-10%, 50Hz	
Motor protection	No additional motor protection is required	
Ingress Protection	IP 44	
Insulation class	F	
Maximum ambient relative humidity	≤ 95%	
Maximum central heating system pressure	1 Mpa	
Maximum suction-side inflow pressure depending on the heating medium temperature	Medium temperature Min. inflow pressure	
	≤ 85 °C	0.005 MPa
	≤ 90 °C	0.028 MPa
≤ 95 °C	0.050 MPa	
Compliance with the EMC standard	EN61000-6-1; EN61000-6-3	
Operating pump sound pressure	43 dB (A)	
Permissible ambient temperature	0~+40°C	
Maximum heating medium temp.	TF 95	
Maximum pump surface temperature	≤ 110°C	
Pumped liquid temperature range	2~+95°C	

RAKSA®

LVIPÖRSSI



06 450 94 44



www.lvi-porssi.fi



Ikarintaival 21, Kurikka FINLAND